

SVLINE
MACHINE TOOLS AND LASER SYSTEMS

REKOVI




KATALOG

ADRESA - BATAJNIČKI PUT 23 11080 ZEMUN / BEOGRAD - SRBIJA
+381 11 3073527
office@svline.rs

www.svline.rs

ORMAN MAX line TIP - SVL



Dimenzija	600x600	600x800	600x1000	800x800	800x1100	Visina (H)	Boja
16H		✓	✓	✓	✓	884 mm	
22H		✓	✓	✓	✓	1150 mm	
26H	✓	✓	✓	✓	✓	1328 mm	
32H	✓	✓	✓	✓	✓	1595 mm	
36H	✓	✓	✓	✓	✓	1771 mm	
42H	✓	✓	✓	✓	✓	2040 mm	
47H	✓	✓	✓	✓	✓	2264 mm	

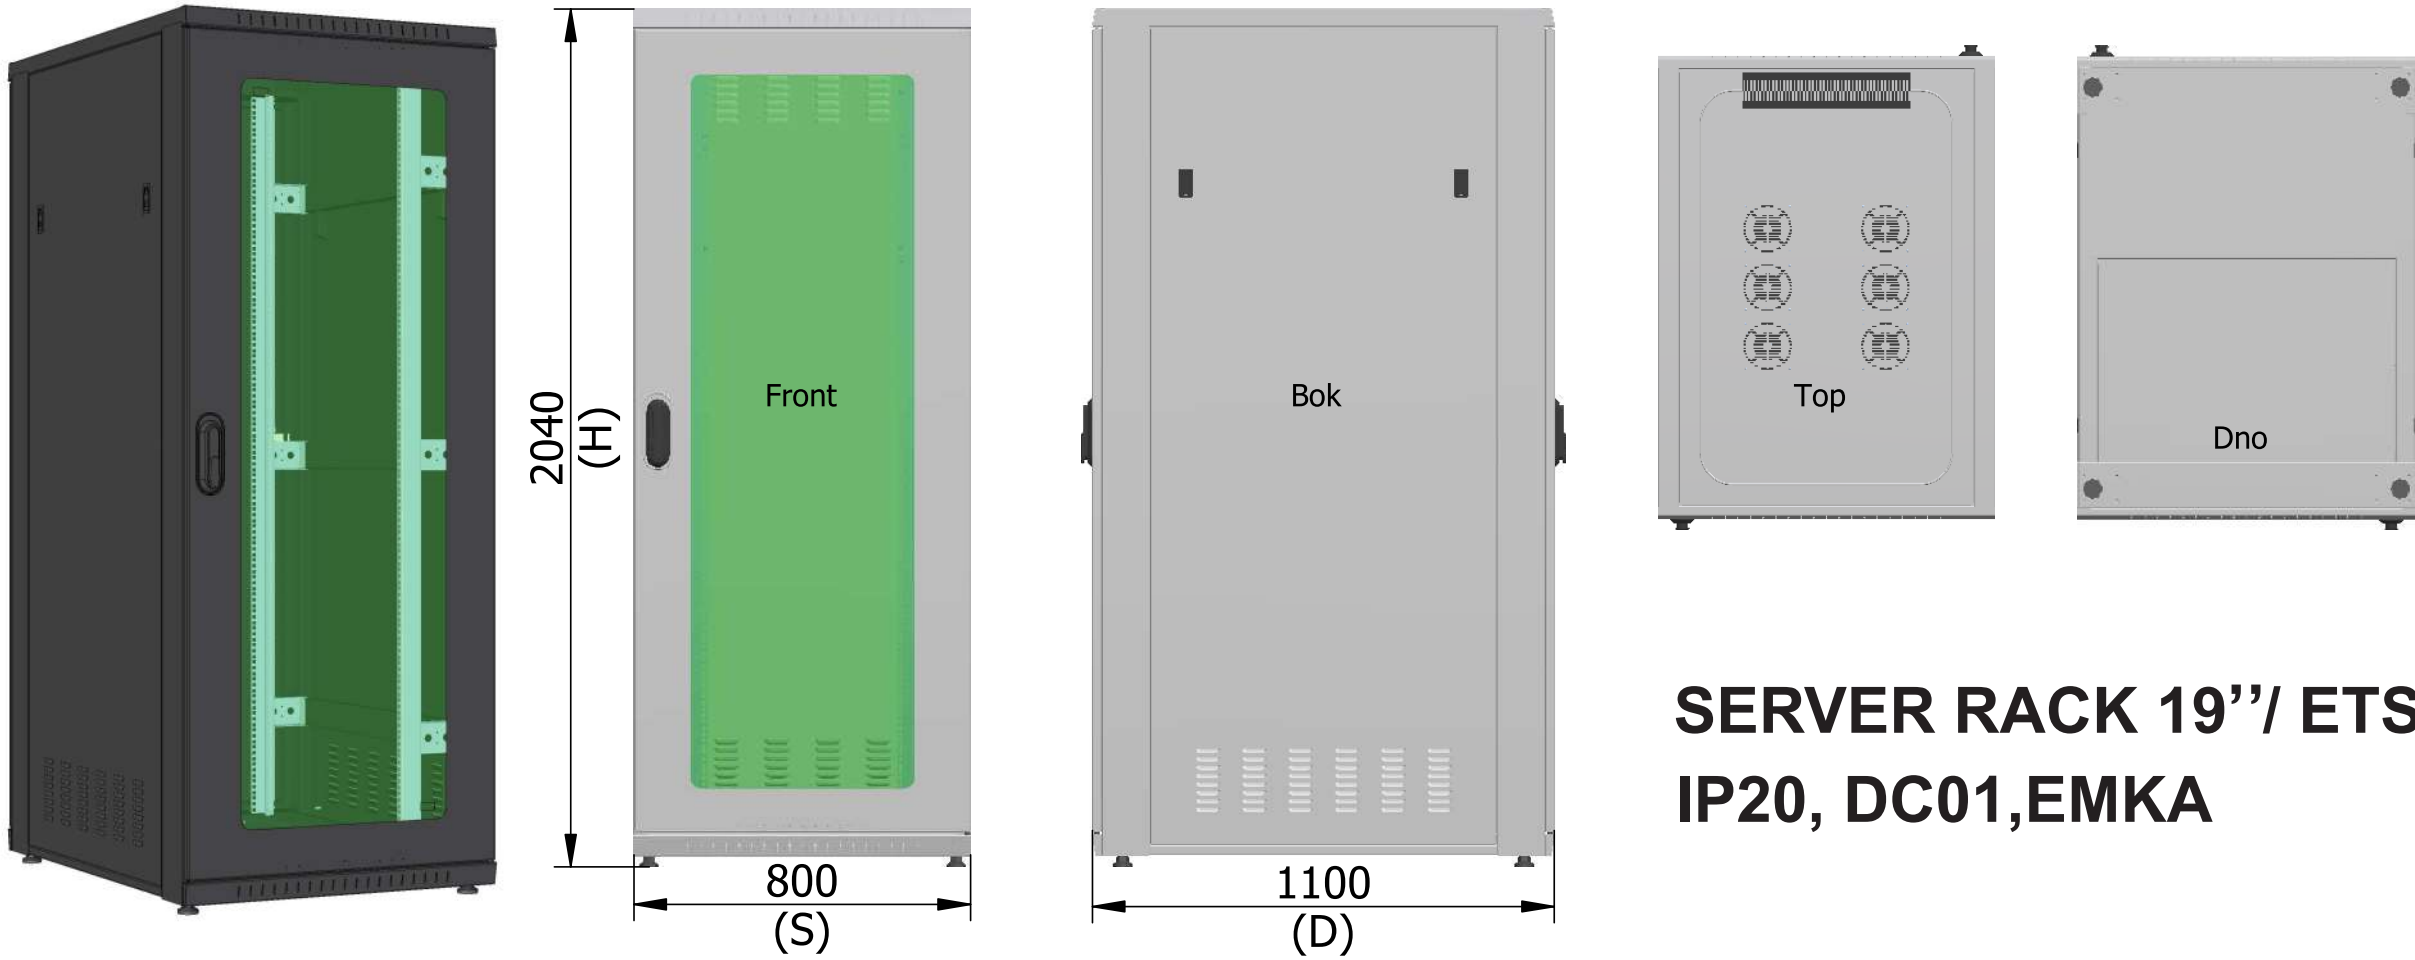



ORMAN MAX line TIP - SVL

OSNOVNE KARAKTERISTIKE:


- Konstrukcija DC01(1,5-2mm)nosivost 800 kg
- Ormani su ofarbani elektrostatičkim putem (RAL7035 ili 9005)
- Demontažne bočne strane
- Demomtažni gornji i donji poklopac sa otvorima za ventilatore i prolaz kablova
- Standardni ormani imaju prednja vrata sa staklom (kaljeno 4mm) i zadnja vrata sa žaluzinama. U svim vratima se ugrađuju bravice iz programa EMKA
- Mogućnost ugradnje i kombinovanja drugih tipova vrata
- Dva para raster letvi - 19 inch-a (detaljA) ili Etsi (detalj B) -**Pocinkovani lim**
- Mogućnost jednostavnog povezivanja više ormara u nizu (slika C)
- Jednostavna ugradnja dodatne opreme (slika D)

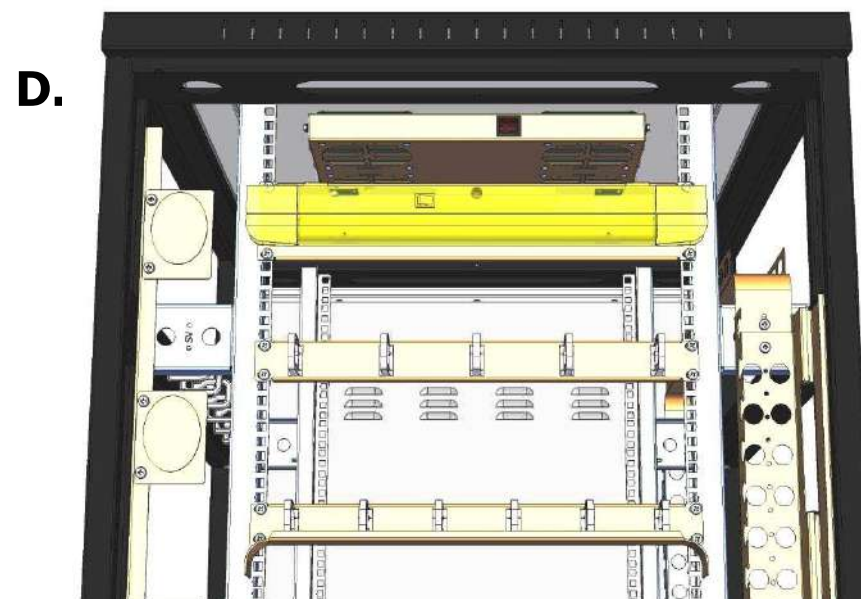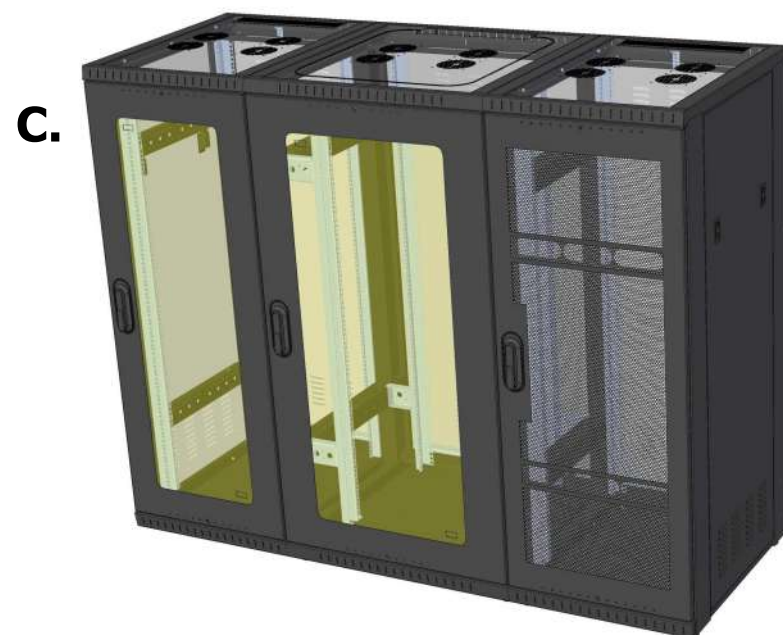

DETALJ A

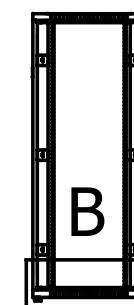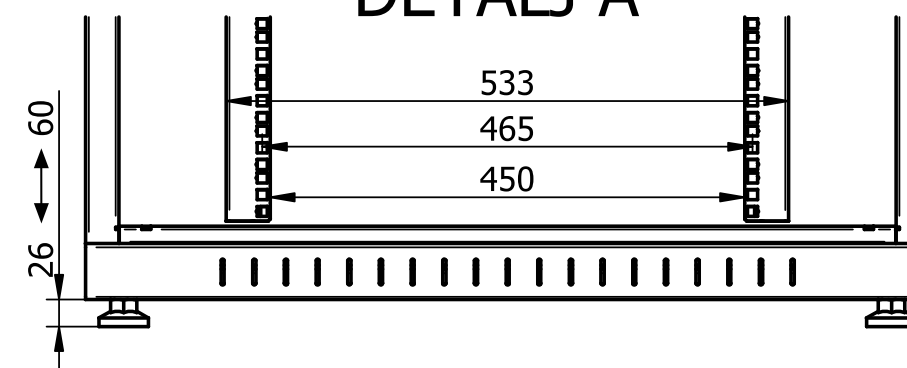

DETALJ B

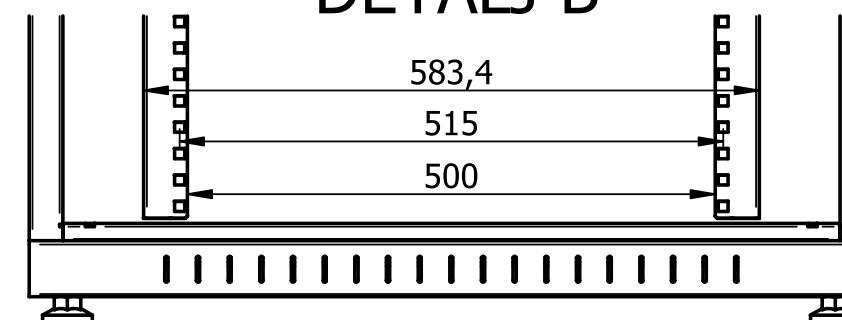


ORMANI MAX line TIP - SVL VRSTE VRATA


1. Blanko vrata
↓




2. Vrata sa žaluzinama
↓

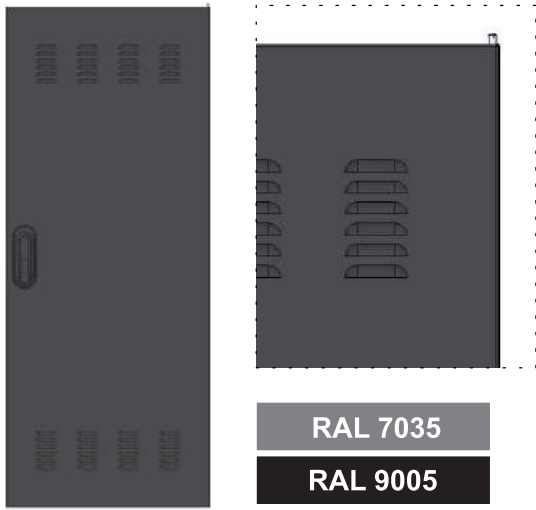



3. Vrata sa staklom
↓

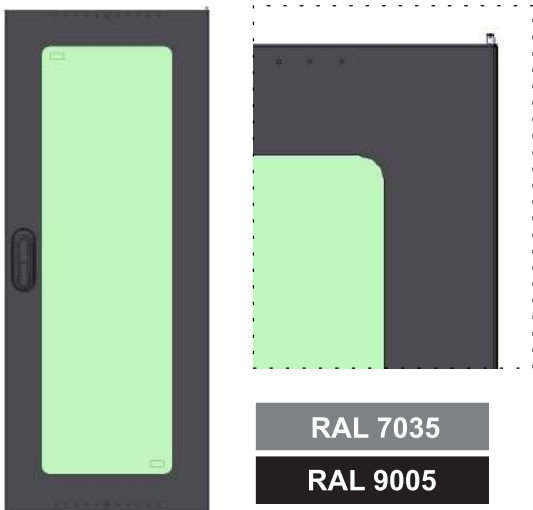


4. Perforirana vrata
↓

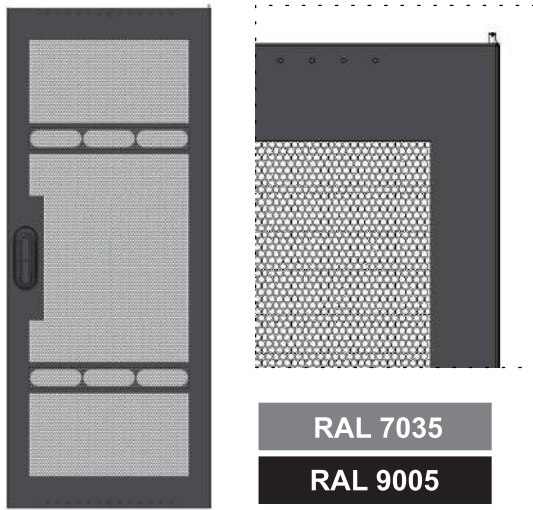

5. Dupla perforirana vrata
↓

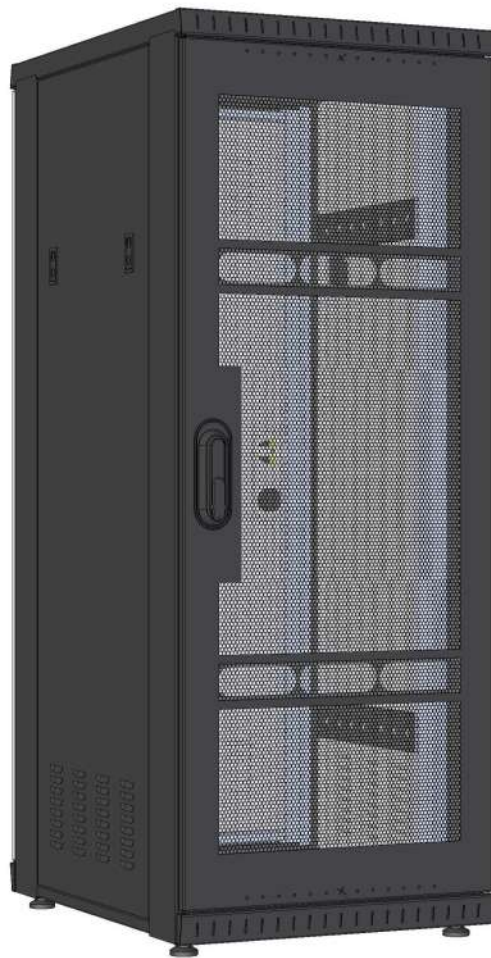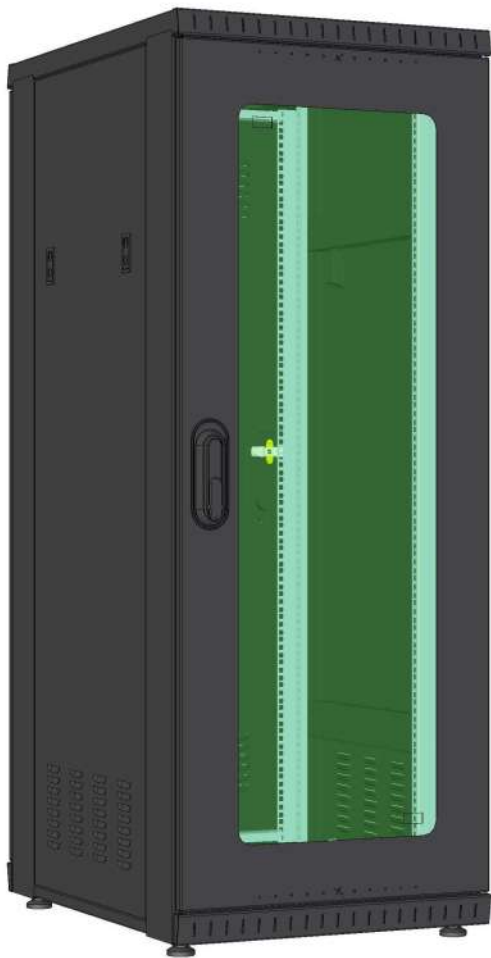

ORMAN MAX line TIP - SVL EXPLODE VIEW

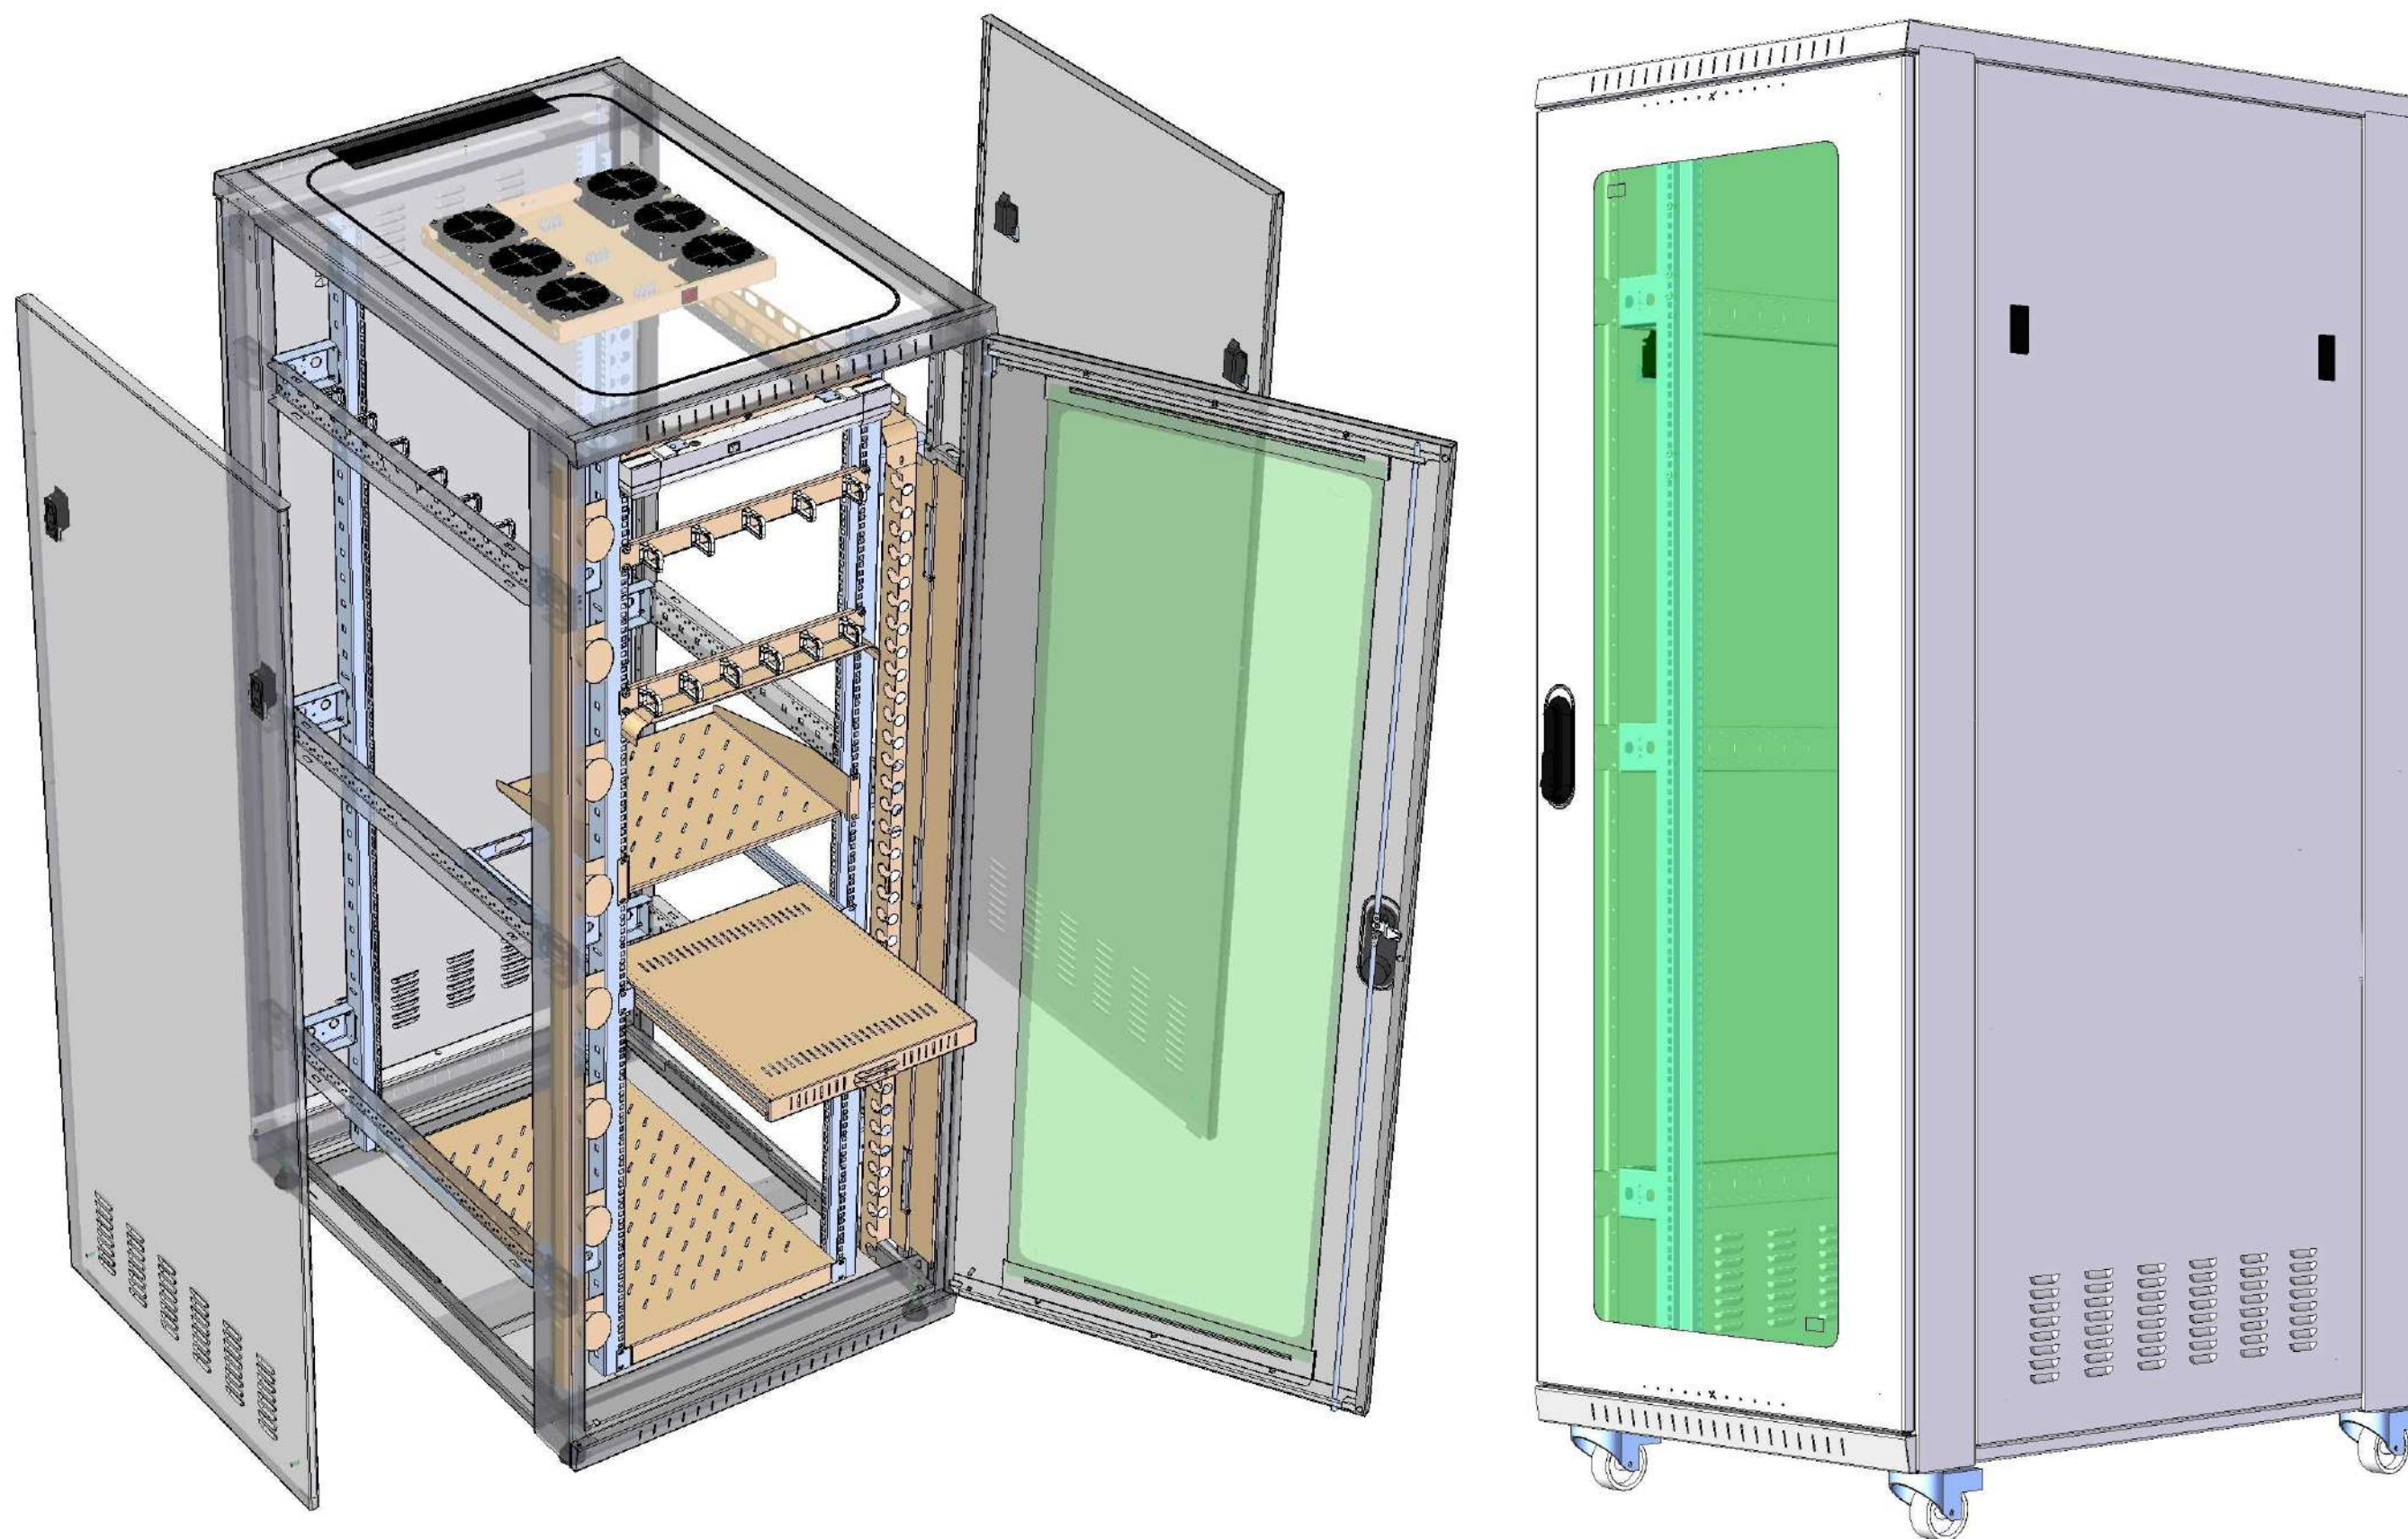


ORMAN MAX line TIP - SLL-L

DC01 ; EMKA; IP 20;

NOSIVOST ORMANA – 50 kg

Dimenzija (SxD)	600x450	600x600	Visina (H)	Boja
7U	✓ (11,7 kg)	✓ (14,6 kg)	420 mm	RAL 7035 / RAL 9005
9U	✓ (13,5 kg)	✓ (16,5 kg)	509 mm	RAL 7035 / RAL 9005
12U	✓ (15,9 kg)	✓ (19,5 kg)	642 mm	RAL 7035 / RAL 9005
16U	✓ (20,1 kg)	✓ (25,1 kg)	820 mm	RAL 7035 / RAL 9005
22U		✓ (31,4 kg)	1086 mm	RAL 7035 / RAL 9005

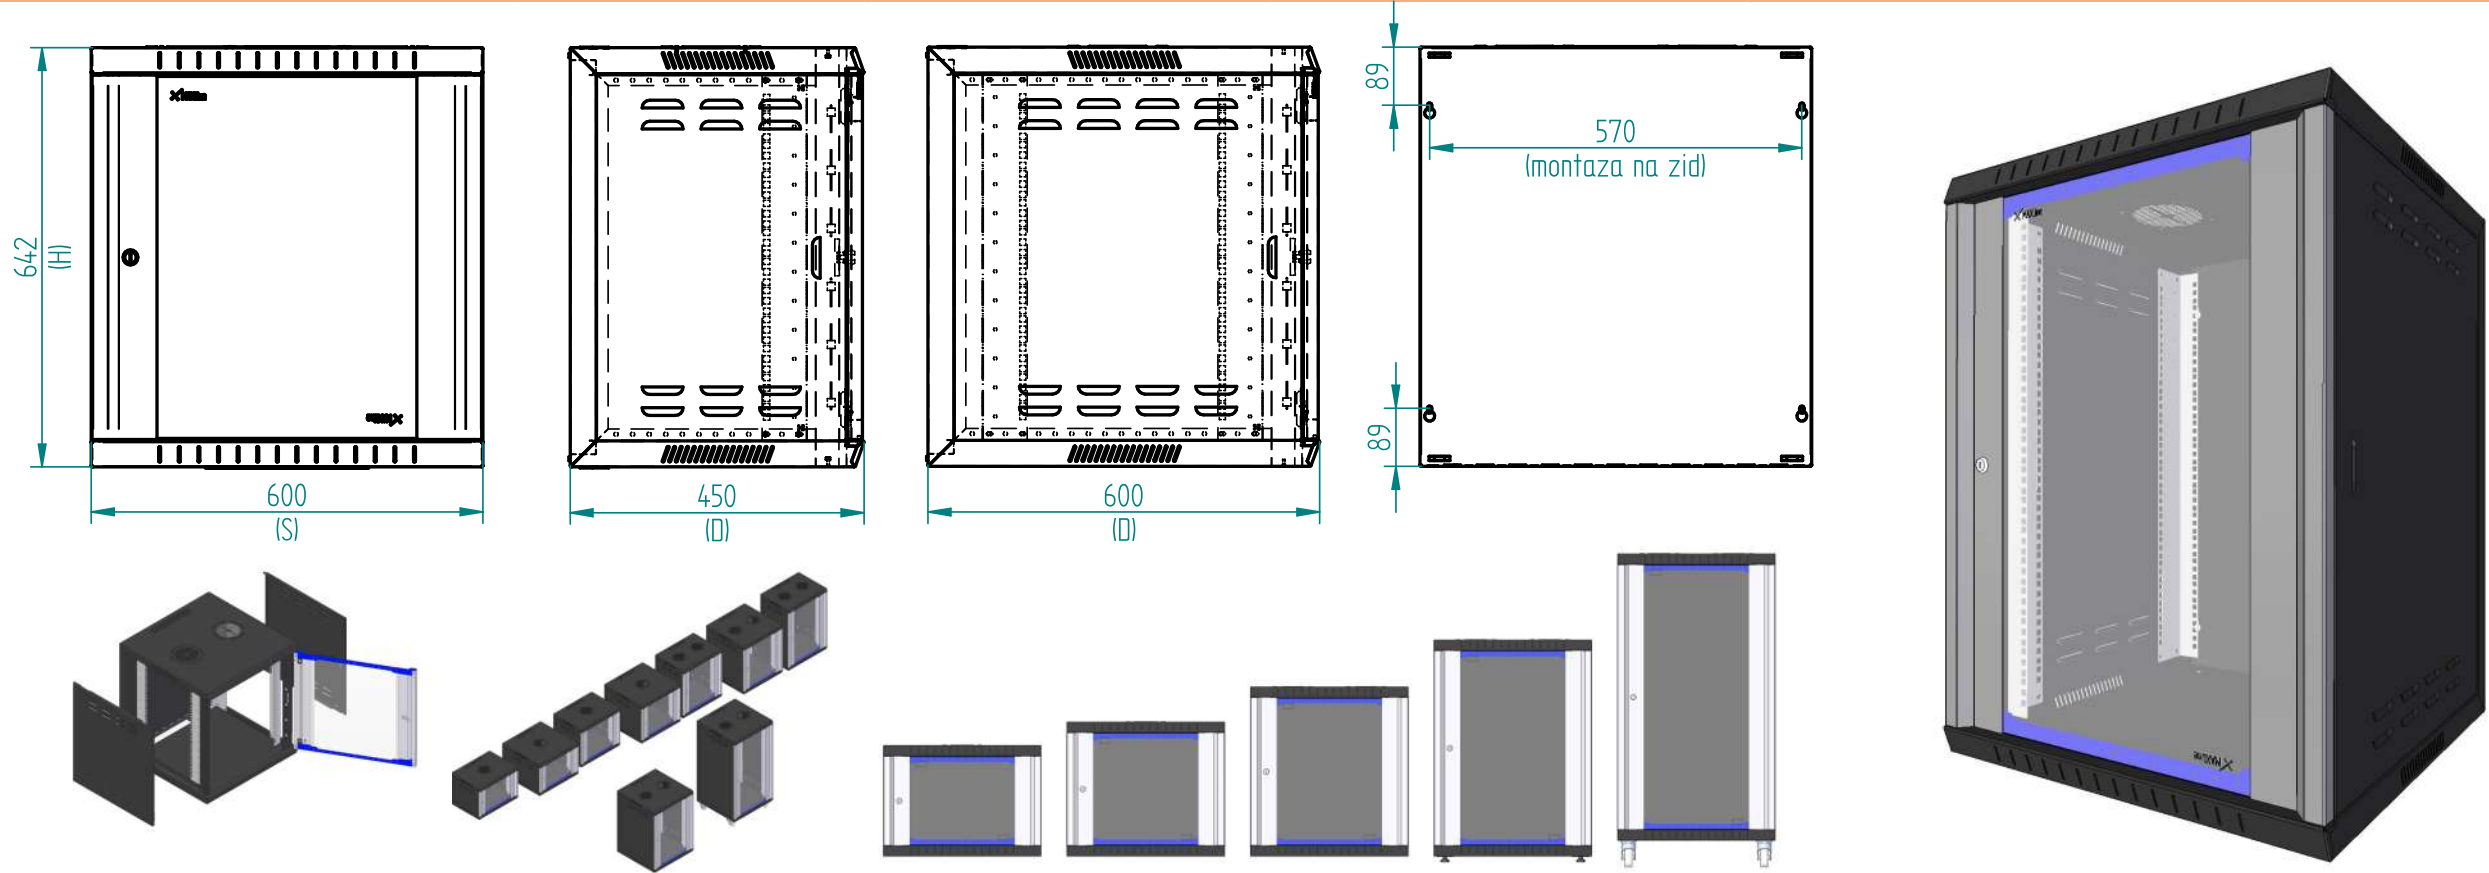

OSNOVNE KARAKTERISTIKE: °°° Nosivost ormana 50 kg °°° Demontažne bočne strane °°° Proizvodi dubine 600 imaju 2 para raster letvi 19", dubine 450 imaju 1 par °°°
°°° Na dnu i poklopcu su otvori za ventilatore i prolaz kablova °°° Uzemljenje svih elemenata °°° Set za montažu na zid °°° Set za montažu uređaja °°°
°°° Ormani visine 16U i 22U se isporučuju sa 4 podešavajuće stope (ili točka) °°° RAL 7035 ili RAL 9005 °°°

Rasteri se izrađuju od pocinkovanog lima DX51D



MACHINE TOOLS AND LASER SYSTEMS

ORMAN MAX line TIP - SLL-L



vrata - staklo



vrata - perforirani lim



vrata puna - lim